




# 5200-HI Series 14"-24"



Tested and Certified by  
IAPMO R&T to NSF/ANSI 372  
and NSF/ANSI 61

**Iron Butterfly Valve for Potable Water**  
**Lug Style**  
**150 psi Non-Shock WOG**  
**Dead End Service to 150 psi Max\***  
**Specifications: MSS SP-67 Type 1**

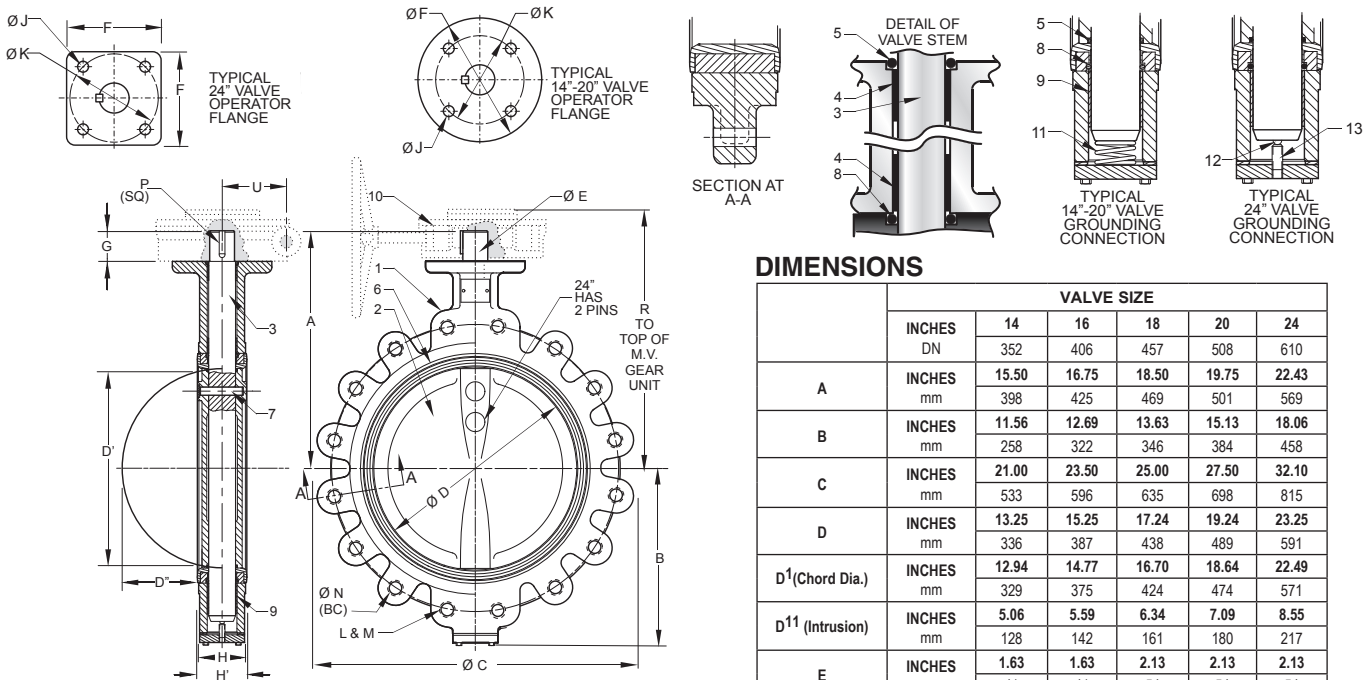

### DIMENSIONS

	VALVE SIZE					
	INCHES DN	14	16	18	20	24
A	INCHES	15.50	16.75	18.50	19.75	22.43
	mm	398	425	469	501	569
B	INCHES	11.56	12.69	13.63	15.13	18.06
	mm	258	322	346	384	458
C	INCHES	21.00	23.50	25.00	27.50	32.10
	mm	533	596	635	698	815
D	INCHES	13.25	15.25	17.24	19.24	23.25
	mm	336	387	438	489	591
D <sup>1</sup> (Chord Dia.)	INCHES	12.94	14.77	16.70	18.64	22.49
	mm	329	375	424	474	571
D <sup>11</sup> (Intrusion)	INCHES	5.06	5.59	6.34	7.09	8.55
	mm	128	142	161	180	217
E	INCHES	1.63	1.63	2.13	2.13	2.13
	mm	41	41	54	54	54
F	INCHES	6.50	6.50	9.50	9.50	7.50
	mm	165	165	241	241	190
G	INCHES	2.00	2.00	3.00	3.00	3.06
	mm	50	50	76	76	77
H (Body)	INCHES	3.06	4.00	4.50	5.00	6.06
	mm	77	101	114	127	153
H <sup>1</sup> (Liner)	INCHES	3.19	4.13	4.63	5.13	6.19
	mm	81	104	117	130	157
J	INCHES	0.69	0.69	0.81	0.81	0.81
	mm	17	17	20	20	20
K	INCHES	5.25	5.25	7.50	7.50	7.50
	mm	133	133	190	190	190
L	No. of Holes	12	16	16	20	20
M	Thread Size	1-8	1-8	1 1/8-7	1 1/8-7	1 1/4-7
N	INCHES	18.75	21.25	22.75	25.00	29.50
	mm	476	540	577	635	749
P (Key Size)	INCHES	0.38	0.38	0.50	0.50	0.50
	mm	9	9	12	12	12
R	INCHES	17.25	18.75	19.63	20.88	25.00
	mm	438	476	458	530	635
U	INCHES	3.13	3.13	4.50	4.50	4.63
	mm	79	79	114	114	117

### MATERIALS LIST

ITEM	PART	MATERIALS
1	BODY	CAST IRON ASTM A126 CL. B
2	DISC	ALUMINUM BRONZE ASTM B148
3	STEM	STAINLESS STEEL TYPE 416
4	TOP BEARING	REINFORCED NYLON
5	STEM O-RING	EPDM
6	LINER	EPDM
7	STEM PIN	ANSI 4140 OR AISI 6150
8	LINER O-RING	EPDM
9	LOWER BEARING	REINFORCED NYLON
10	OPERATOR	GEAR OPERATOR
11	GROUNDING SPRING	STAINLESS STEEL TYPE 302
12	GROUNDING BALL	AISI-1022
13	TENSION SCREW	AISI-1020

\* Uni-directional

**Note:** Lead free refers to the wetted surface of the pipe, fittings and fixtures in potable water systems that have a weighted average lead content ≤ 0.25%. Source: California Health and Safety Code (116875).

The information presented on this sheet is correct at time of publication. Hammond Valve reserves the right to change design and/or materials without notice. For our Installation, Operation and Maintenance Manual and the most current product information go to [www.hammondvalve.com](http://www.hammondvalve.com). Hammond Valve is a registered trademark of Milwaukee Valve.

⚠ State of California Prop 65 **WARNING:** Cancer and Reproductive Harm. For more information visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).



6	2	1	1	01
SERIES	BODY DESCRIPTION / MATERIAL	DISC & STEM MATERIAL DESCRIPTION	LINER MATERIAL	OPTIONS
<b>6 - 6000 SERIES</b> <b>5 - 5000 SERIES</b>	<b>1 - WAFER / IRON (ASTM A126B)*</b> <b>2 - LUG / IRON (ASTM A126B)*</b> <b>3 - WAFER / DUCTILE (ASTM A536)</b> <b>4 - LUG / DUCTILE (ASTM A536)</b> <b>8 - WAFER / DUCTILE EPOXY COATED</b> <b>9 - LUG / DUCTILE EPOXY COATED</b>	<b>0 - NICKEL PLATED DUCTILE</b> <b>IRON / 416 S.S.</b> <b>1 - ALUMINUM/BRONZE (ASTM B148) / 416 S.S.</b> <b>2 - 316 S.S. / 316 S.S.</b> <b>3 - ALUMINUM/BRONZE (ASTM B148) / 316 S.S.</b> <b>4 - NICKEL PLATED DUCTILE</b> <b>IRON / 316 S.S.</b> <b>5 - EPOXY COATED IRON</b> <b>6 - NYLON COATED IRON</b>	<b>0 - BUNA - N</b> <b>1 - EPDM</b> <b>3 - VITON</b> <b>5 - BLACK NEOPRENE</b> <b>6 - WHITE NEOPRENE</b> <b>7 - HYPALON</b> <b>8 - TEFLON OVER BUNA</b>	<b>00 - BARE STEM</b> <b>01 - 10 POSITION LEVER LOCK</b> <b>02 - 10 POSITION LEVER W/ MEMORY STOP</b> <b>03 - GEAR OPERATOR W/ HANDWHEEL</b>
* 5000 SERIES IS ONLY AVAILABLE IN CAST IRON WAFER OR LUG BODY WITH ALUMINUM BRONZE DISC, EPDM LINER, LEVER OR GEAR OPERATOR.	*HAMMOND VALVE RESERVES THE RIGHT TO UPGRADE TO DUCTILE IRON BODIES WITHOUT NOTICE AND WITHOUT ADDITIONAL COST.			